

the Heater Treater®



FALSKEN WATER SYSTEMS, INC.

Quality Water Treatment Equipment

**Low cost hard water scale protection
for all tankless water heaters**

**Economical enough to include on every
tankless water heater installation**

HOW IT WORKS


The Heater Treater is installed on the feed water line just prior to the tankless water heater. As the water passes through the filter cartridge, the treatment media uniquely located in the interior of the filter slowly dissolves into the water supply, providing scale protection to the heater in several ways.

FIRST: The treatment media interferes with the ability of the calcium and magnesium to crystallize or become scale when heated. This by itself is a very effective scale prevention process.

SECOND: It lays down a thin protective coating on the interior of the heater (most importantly the heat exchanger) that does not allow any scale that might be created from adhering to the interior of the heater.

LASTLY: The 5 micron filter provides added protection from rust, sediment or debris that could affect the operation of the heater.

Our Treatment Process is What Separates the Treater from the Competition

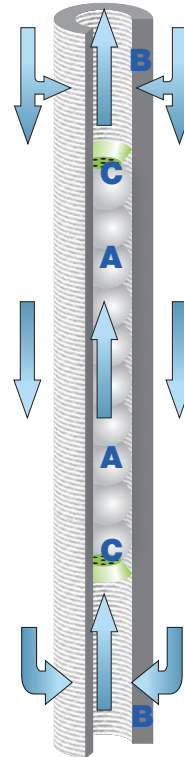


A) The appropriate amount of treatment media combined with the flow rate introduces the correct dosage for effective scale prevention throughout the life span of the cartridge.

B) The location of the treatment media is very important. Unobstructed areas on both ends of the filter allow for increased water flow, extending the life of the media. This lowers the maintenance cost, giving the filter cartridge a longer effective life span.

C) We have our own clips designed specifically for the filters we use. These clips hold the treatment media firmly in place without the use of a foreign substance, such as glue.

We were the first to identify the need for scale protection with tankless water heaters and the first to provide a solution. Ask for the The Heater Treater by name. The proven leader and most recommended scale prevention unit for tankless water heaters, tank water heaters and solar hot water systems.



Model FtHT-10-REVFLO & Model FtHT-10-REVFLO-G



Tankless Water Heaters Rated up to 5.0 gpm
 $\frac{3}{4}$ " FPT inlet and outlet
 15" Tall - 5 $\frac{3}{4}$ " Wide
 Filter is 5 micron
 Pressure Relief Button
 Flow Direction is Either Direction
 Shipping Weight 5.0 Lbs
 Replacement Filter: **FtHT-10RF**

Comes with mounting bracket, hardware, gauge (w/ G Model) and wrench.

Model FtHT-20-REVFLO & Model FtHT-20-REVFLO-G Reversible Flow Unit



Tankless Water Heaters Rated up to 9.8 gpm
 $\frac{3}{4}$ " FPT inlet and outlet
 25 $\frac{1}{4}$ " Tall - 5 $\frac{3}{4}$ " Wide
 Filter is 5 micron
 Pressure Relief Button
 Flow Direction is Either Direction
 Shipping Weight 8.0 Lbs
 Replacement Filter: **FtHT-20RF**

Comes with mounting bracket, hardware, gauge (w/ G Model) and wrench.

Model FtHT-BB



Tankless Water Heaters Rated up to 15.0 gpm
 1" FPT inlet and outlet
 1 $\frac{1}{2}$ " inlet and outlet (also available)
 Filter is 5 micron
 23" Tall - 7 $\frac{1}{4}$ " Wide
 Pressure Gauge on Outlet Only
 Pressure Relief Button
 Flow Direction is Either Direction
 Shipping Weight 12.0 Lbs
 Replacement Filter: **FtHT-BBRF**

Comes with mounting bracket, hardware, gauge and wrench.

Model FtHT-20RF Replacement Filter Kit for: FtHT-20-REVFLO-G FtHT-20-REVFLO



Keep your heater running year after year with our replacement filter kit. Includes: 5 micron pre-0filter with scale prevention media, O-Ring for past and current models, lubricant and instructions.



Recommended to replace every 9-12 months or as instructed.

Model FtHT-BB-HFC50



For Multiple Tankless Water Heater Applications
 Rated up to 50.0 gpm
 1 $\frac{1}{2}$ " FPT inlet and outlet
 Filter is 50 micron
 23" Tall - 7 $\frac{1}{4}$ " Wide
 Pressure Gauge on Outlet Only
 Drain Valve
 Flow Direction is Either Direction
 Extra Filter Pack Included
 Shipping Weight 14.0 Lbs
 Replacement Filter: **FtHT-BB-HFC50RF**

Comes with mounting bracket, hardware, gauge and wrench.

Model FtHT-Commercial



For Multiple Heater Applications
 Units from 50 gpm up to 150 gpm
 2" FPT inlet and outlet
 Stainless Steel Housings
 Flow Direction is Either Direction
 Drain Adapters
 Fitting for Gauge
 *Gauge Not Included

Call for sizing and application assistance.