

# Water Softener Professional Series FAL-5810WS-2.5 4-6 Bathroom Homes



## Operating Features


- Brass sweat adapters for easy installation, adapters 1.25"-1.5"
- Up to 30 gpm flow rate
- Easy connect fittings allow for fast installations
- Soft water brine refill
- Simple electronics makes control setup and programming a snap
- Valve utilizes a meter system allowing it to track and record gallon usage
- Regeneration occurs based on exact gallons of water used
- Digital display indicates exact time of day and gallons remaining until next regeneration
- Each cycle can be time adjusted for efficiency and special application requirements
- High flow integrated bypass valve
- Vacation mode
- Automatically filters out dirt and sediment
- Install inside or outside (NEMA-3R rated)

## Electrical Facilities

- An uninterrupted alternating current (120 VAC) supply is required.
- The control uses a transformer to supply 12 VDC.

### Compliant to one or more of the following

- FDA, EPA, NSF and/or WQA standards for POE equipment
- No Lead Compliant to CA AB 1953
- Compliant to CA SB 1006 as pertains to CA water softener efficiency standards
- LA City compliant

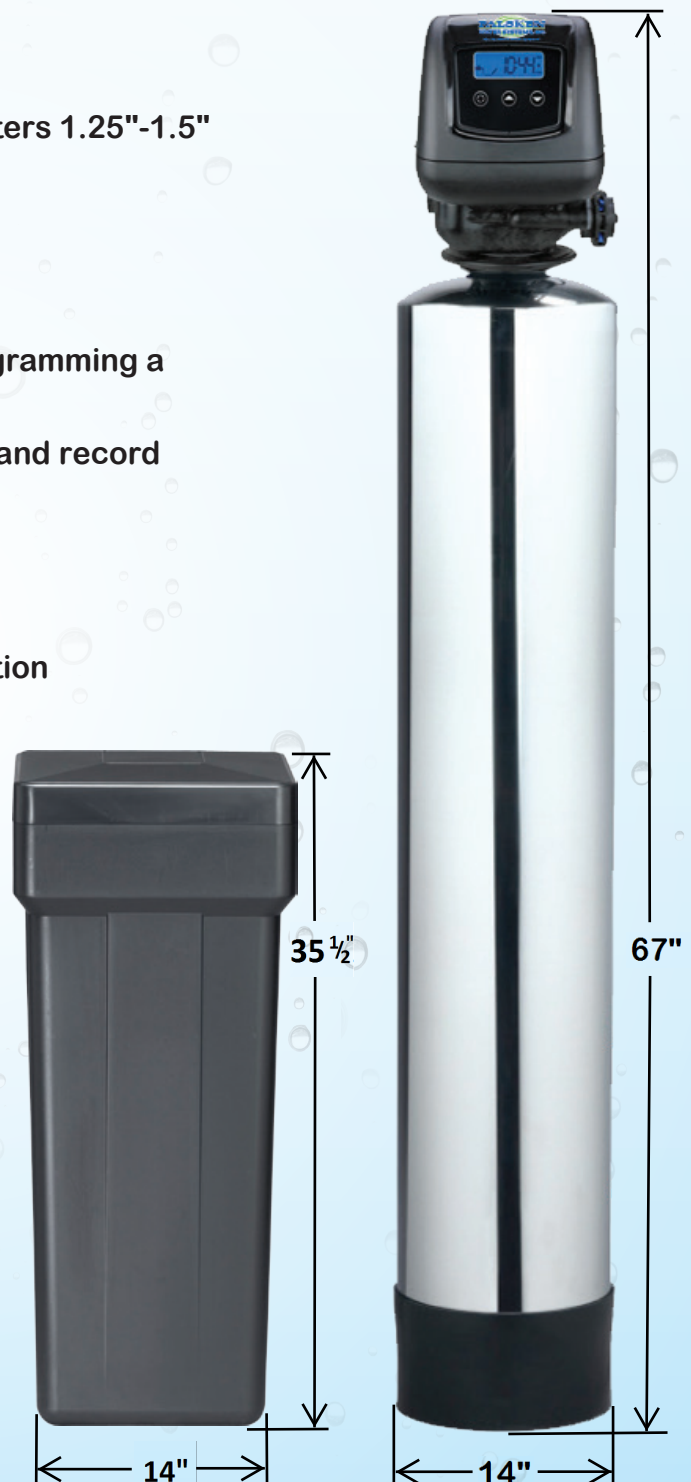

All dimensions are approximate.

Falsken Water Systems reserves the right to change components at our discretion.